




REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.07.16	JU
	01	new Order Information	26.09.18	MR

technical specification

Current Rating: 2A AC, DC
 Voltage Rating: 100V AC,DC
 Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
 Contact Resistance: 10mΩ
 Insulation Resistance: 1000MΩ
 Withstanding Voltage: 800V AC/minute
 Material Pin: Brass
 Material: UL94V-0

Dimension:

A = (No. of Pos. x 2) - 2
 B = A + 4.00
 C = A + 2.80

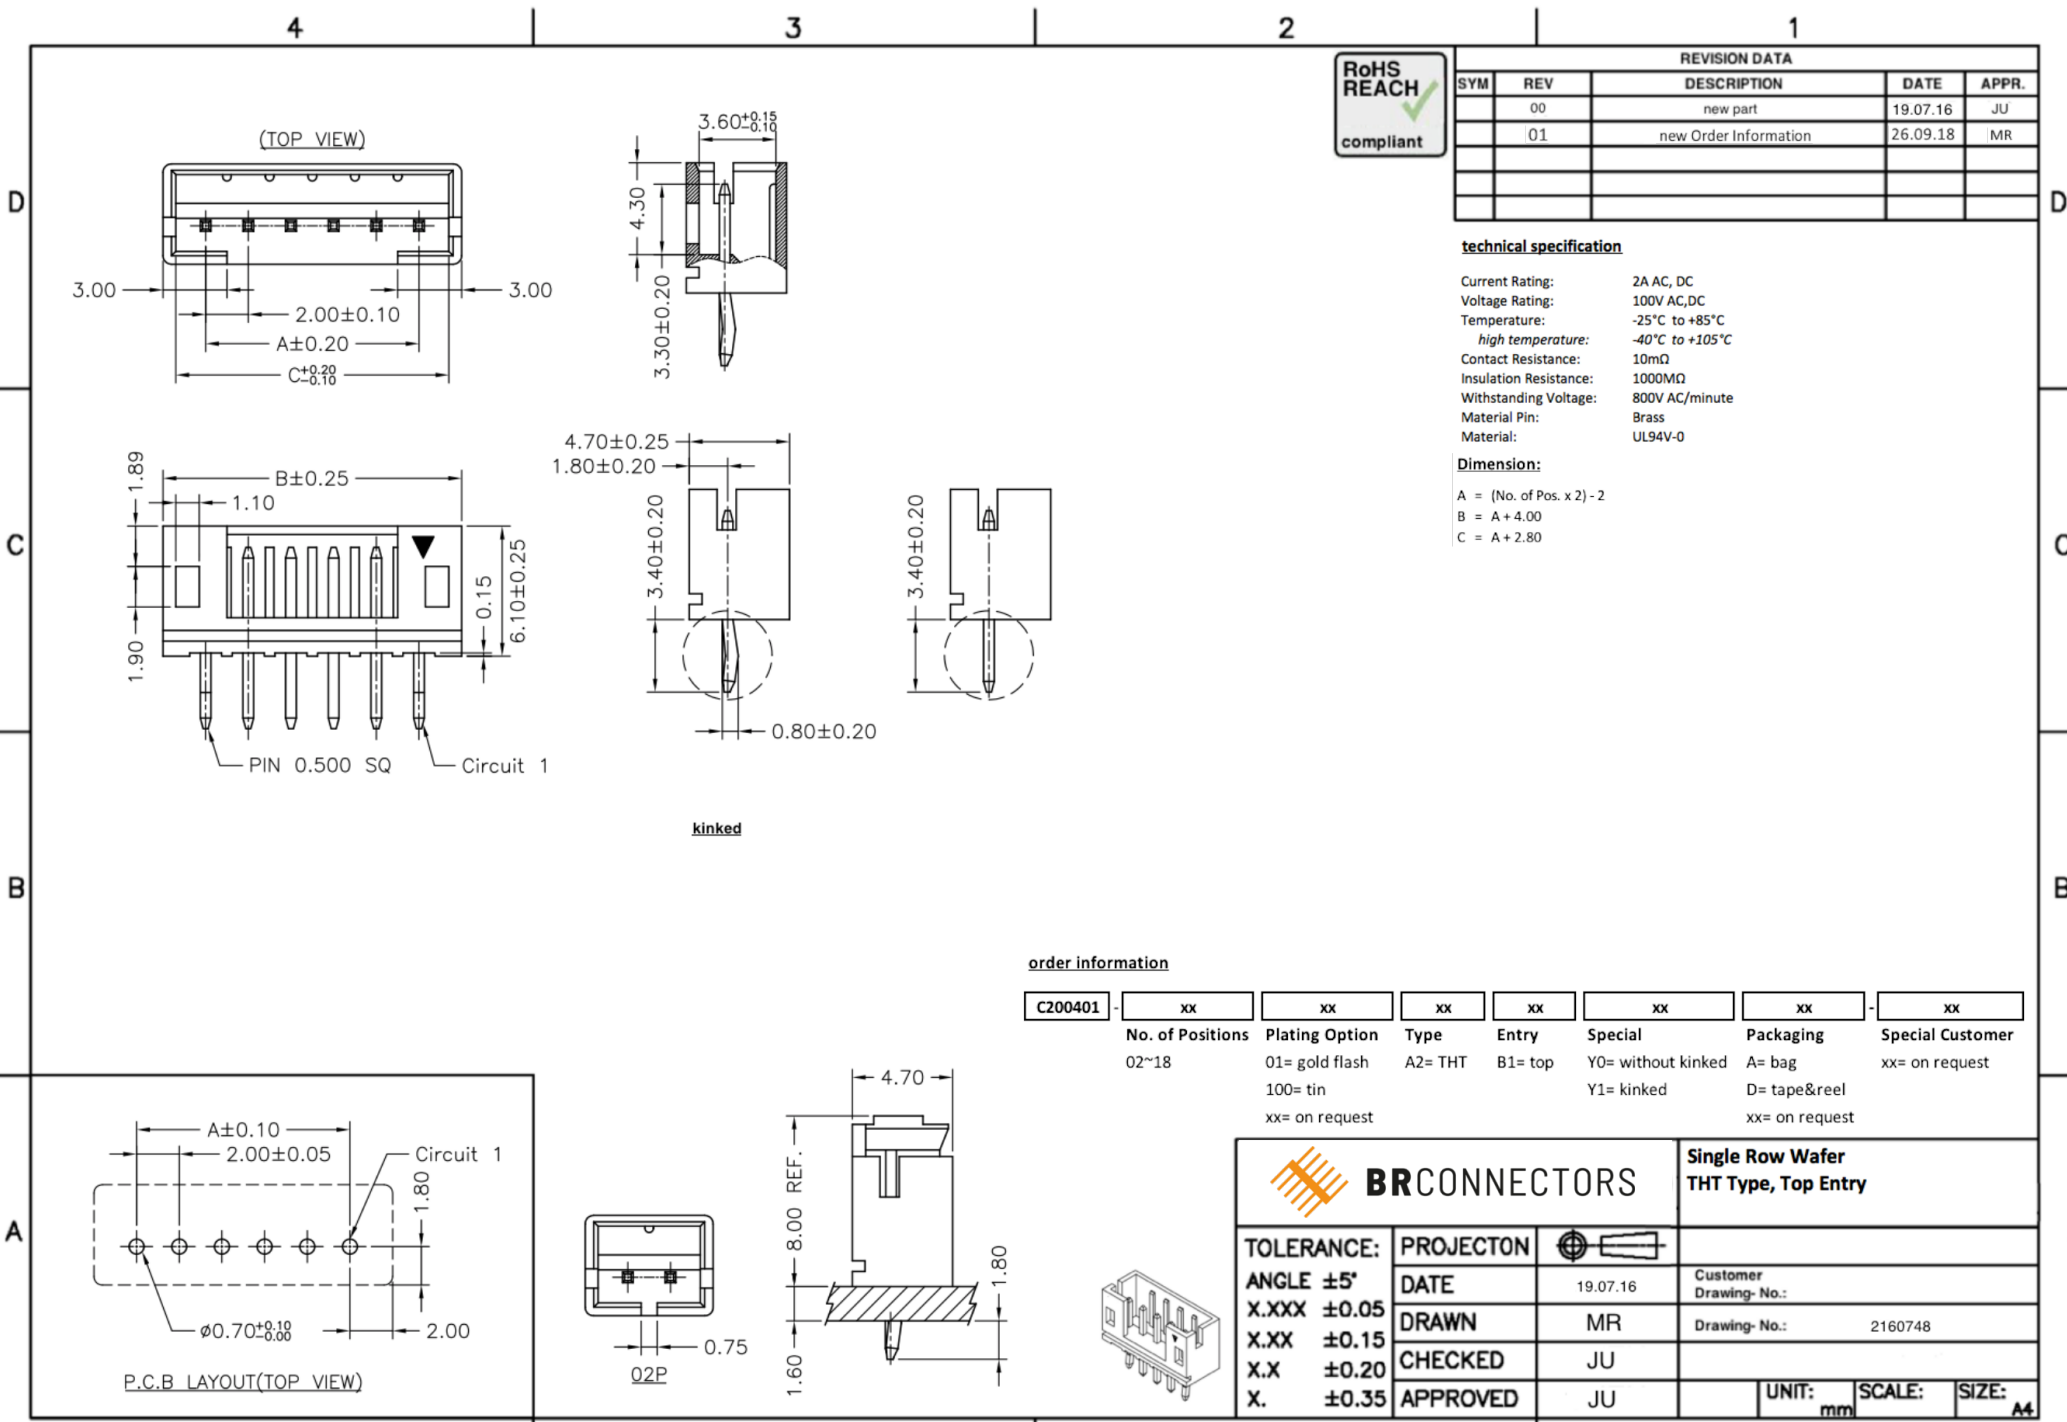

order information

C200401	xx	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Type	Entry	Special	Packaging	Special Customer	
02~18	01= gold flash 100= tin xx= on request	A2= THT	B1= top	Y0= without kinked Y1= kinked	A= bag D= tape&reel xx= on request	xx= on request	

		Single Row Wafer THT Type, Top Entry		
TOLERANCE:	PROJECTON			
ANGLE ±5°	DATE	19.07.16	Customer Drawing- No.:	
X.XXX ±0.05	DRAWN	MR	Drawing- No.: 2160748	
X.XX ±0.15	CHECKED	JU		
X.X ±0.20	APPROVED	JU		
X. ±0.35			UNIT: mm	SCALE: SIZE: A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.