

4

3

2

1

RoHS REACH compliant




REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

Electrical

Current rating: 0,75Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Isolation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 300V AC/minute

Material



Contact: Brass
 Isolator: High Temperature, Thermoplastic UL94V-0
 Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

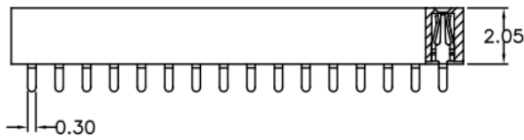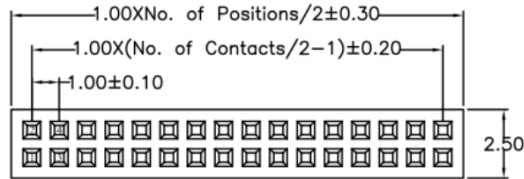

order information

B100102	-	xx	xx	xx	-	xx
No. of Positions		Plating Option	Packaging			Special Customer
04~100		01= gold flash	A= bag			
		xx= on request	C= tube			
			xx= on request			

Recommended P.C.B Board Hole Layout

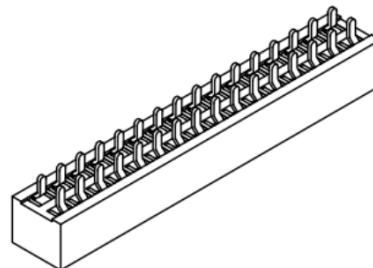

	PROJECTON		general tolerances to DIN ISO 2768-1
	DATE	30.03.2017	Customer Drawing- No.:
	DRAWN	MR	Drawing- No.: 2160772
	CHECKED	BR	
APPROVED	BR		UNIT: mm SCALE: SIZE: A4