

4




3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	20.04.17	MR

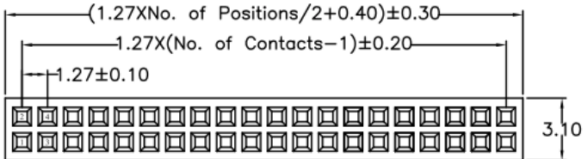



**Electrical**  
 Current rating: 1Amps/contact max.  
 Contact resistance: ≤ 20mΩ/contact  
 Isolation resistance: ≥ 1000MΩ at V=100V  
 Withstanding Voltage: 300V AC/minute

**Material**  
 Contact: Phosphor Bronze  
 Isolator: High Temperature, Thermoplastic UL94V-0  
 Operating temperature: Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

order information

B127104	-	xx	xx	xx	-	xx
No. of Positions		Plating Option	Packaging			Special Customer
04~80		01= gold flash	A= bag			
		xx= on request	C= tube			
			xx= on request			

Recommended P.C.B Board Hole Layout



	<b>PROJECTON</b>		<b>Dual Row Female Header Straight Type</b>		
	<b>DATE</b>	20.04.2017	Customer Drawing-No.:		
	<b>DRAWN</b>	MR	Drawing-No.: 2161052		
	<b>CHECKED</b>	BR			
	<b>APPROVED</b>	BR	<b>UNIT:</b> mm	<b>SCALE:</b>	<b>SIZE:</b> A4

Tolerance:  
 X. ±0.50  
 .X ±0.35  
 .XX ±0.25  
 .XXX ±0.05  
 X\* ±2\*