

4




3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	20.04.17	MR

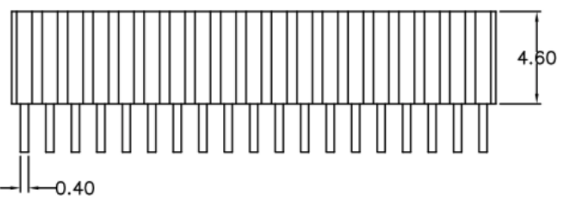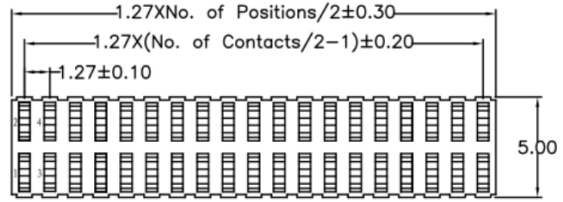

Electrical
 Current rating: 1Amps/contact max.
 Contact resistance: ≤ 20mΩ/contact
 Isolation resistance: ≥ 1000MΩ at V=100V
 Withstanding Voltage: 300V AC/minute



Material
 Contact: Brass
 Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

order information

B127106	-	xx	xx	xx	-	xx
No. of Positions		Plating Option	Packaging			Special Customer
04~100		01= gold flash	A= bag			
		xx= on request	C= tube			
			xx= on request			

Recommended P.C.B Board Hole Layout



	Dual Row Female Header Straight Type	
	PROJECTON	
	DATE	20.04.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X* ±2*	Customer Drawing-No.:	Drawing-No.: 2161053
	UNIT: mm	SCALE: SIZE: A4