

4


3

2

1





REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	20.04.17	MR

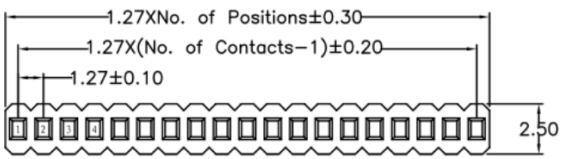

**Electrical**  
 Current rating: 1Amps/contact max.  
 Contact resistance: ≤ 20mΩ/contact  
 Isolation resistance: ≥ 1000MΩ at V=100V  
 Withstanding Voltage: 300V AC/minute

**Material**  
 Contact: Brass  
 Isolator: High Temperature, Thermoplastic UL94V-0

**Operating temperature:** Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

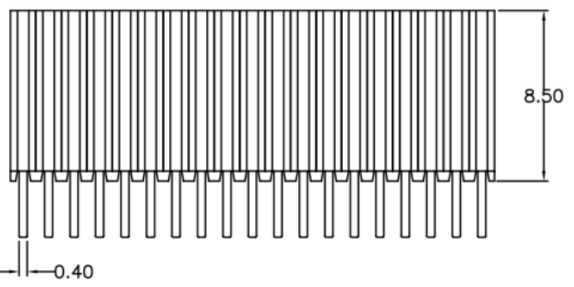

D

D

C

C


B

B


order information

B127107	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
02~40	01= gold flash	A= bag		
	xx= on request	C= tube		
		xx= on request		

Recommended P.C.B Board Hole Layout



A



	<b>BRCONNECTORS</b>		<b>Single Row Female Header Straight Type</b>		
	PROJECTON				
	DATE	20.04.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160802		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

2

1