

RoHS
REACH
compliant



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

Electrical

Current rating: 1Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Isolation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 300V AC/minute

Material



Contact: Phosphor Bronze
 Isolator: High Temperature, Thermoplastic UL94V-0
 Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

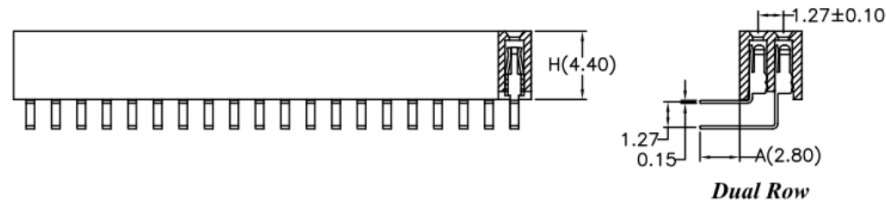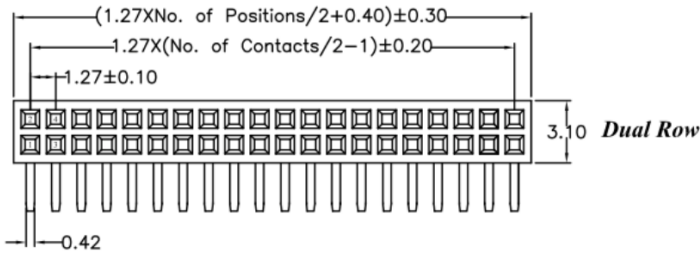

order information

B127122	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Insulator Height	Packaging	Special Customer	
04~80	01= gold flash xx= on request	20= H= 2.00mm 34= H= 3.40mm 44= H= 4.40mm	A= bag C= tube xx= on request		
		xx= on request			

Recommended
P.C.B Board
Hole Layout



	BRCONNECTORS		Dual Row Female Header Right Angle Type		
	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160803		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

Tolerance:
 X. ±0.50
 .X ±0.35
 .XX ±0.25
 .XXX ±0.05
 X* ±2*