

4



3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR
	01	new order information	05.11.18	MR

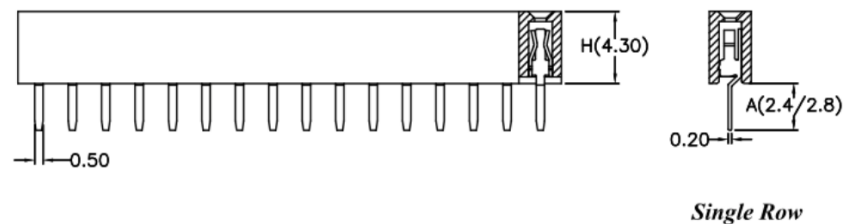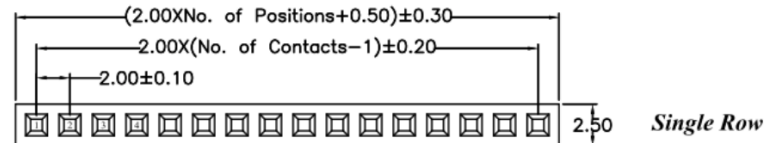

Electrical
Current rating: 1,5Amps/contact max.
Contact resistance: $\leq 20m\Omega$ /contact
Isolation resistance: $\geq 1000M\Omega$ at V=100V
Withstanding Voltage: 450V AC/minute



Material
Contact: Phosphor Bronze
Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Tin plated: -40°C to +105°C
 Gold plated: -55°C to +105°C

order information

B200101	-	XX	XX	XX	XX	XX	-	XX
		No. of Positions	Plating Option	Insulator Height	Packaging	Dimension		Special Customer
		02~40	01= gold flash xx= on request	40= H= 4.00mm 43= H= 4.30mm 46= H= 4.60mm xx= on request	A= bag C= tube xx= on request	A xx= on request		xx= on request

Recommended P.C.B Board Hole Layout



	BRCONNECTORS		Single Row Female Header Straight Type		
	Tolerance:	PROJECTON			
	.X ± 0.35	DATE	22.03.2017	Customer Drawing-No.:	
	.XX ± 0.25	DRAWN	MR	Drawing-No.: 2160836	
	.XXX ± 0.10	CHECKED	BR		
.X° ±2°	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4