

4




3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

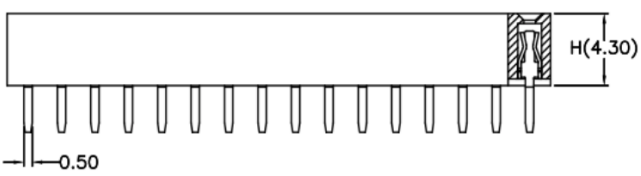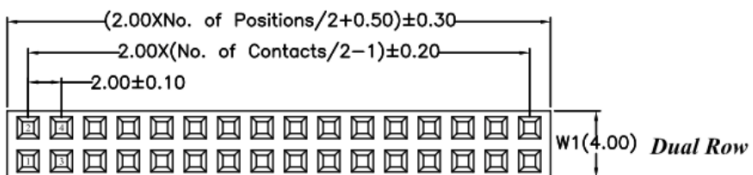

Dual Row

Electrical
Current rating: 1,5Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 450V AC/minute



Material
Contact: Phosphor Bronze
Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Tin plated: -40°C to +105°C
 Gold plated: -55°C to +105°C

order information

B200102	-	XX	XX	XX	XX	XX	-	XX
		No. of Positions	Plating Option	Insulator Height	Packaging	Dimension		Special Customer
		04~80	01= gold flash xx= on request	40= H= 4.00mm 43= H= 4.30mm 46= H= 4.60mm xx= on request	A= bag C= tube xx= on request	A/ W1 xx= on request		xx= on request

Recommended P.C.B Board Hole Layout



	Dual Row Female Header Straight Type	
	PROJECTON	22.03.2017
	DATE	Customer Drawing-No.:
	DRAWN	MR Drawing-No.: 2160836
	CHECKED	BR
APPROVED	BR	UNIT: mm SCALE: SIZE: A4