

4

3

2

1






REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

Electrical

Current rating: 1,5Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Isolation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 450V AC/minute

Material



Contact: Phosphor Bronze
 Isolator: High Temperature, Thermoplastic UL94V-0
 Operating temperature: Tin plated: -40°C to +105°C
 Gold plated: -55°C to +105°C

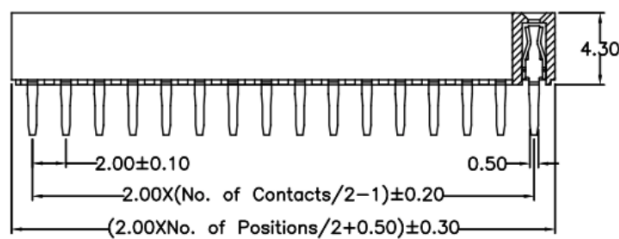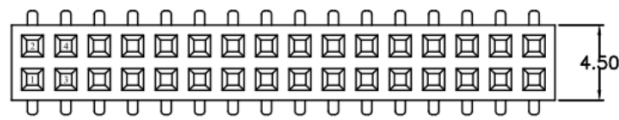

order information

B200108	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
04*80	01= gold flash	A= bag		
	xx= on request	C= tube		
		xx= on request		

Recommended P.C.B Board Hole Layout

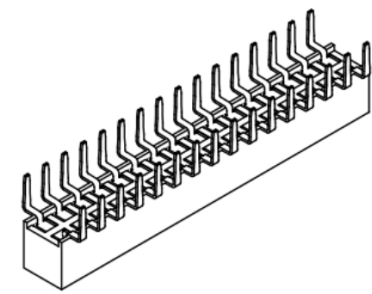

 BRCONNECTORS Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X* ±2*	PROJECTON		Dual Row Female Header Bottom Entry		
	DATE	22.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160849		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4