

4

3

2


1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

D


D

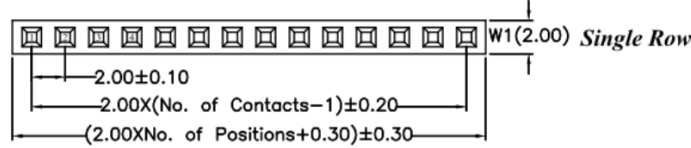

Electrical
Current rating: 1,5Amps/contact max.
Contact resistance: ≅ 20mΩ/contact
Isolation resistance: ≅ 1000MΩ at V=100V
Withstanding Voltage: 450V AC/minute

C

C

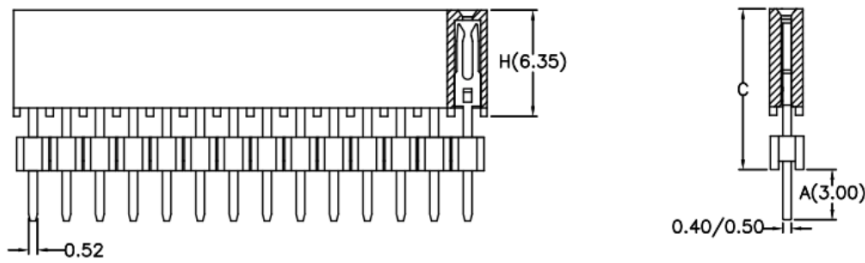

Material
Contact: Brass
Isolator: High Temperature, Thermoplastic UL94V-0
Operating temperature: Tin plated: -40°C to +105°C
 Gold plated: -55°C to +105°C



B

B

order information

B200109	xx	xx	xx	xx	xx
No. of Positions	Plating Option	No. of Insulators	Packaging	Special Customer	
02~40	01= gold flash xx= on request	1=1pcs 2=2pcs 3=3pcs 4=4pcs xx=on request	A= bag C= tube xx= on request		

A



	BRCONNECTORS		Single Row Female Header Straight Type		
	PROJECTON				
	DATE	22.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160840		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.