

RoHS
REACH
compliant



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

Electrical
Current rating: 1,5Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 450V AC/minute

Material
Contact: Phosphor Bronze
Isolator: High Temperature, Thermoplastic UL94V-0
Operating temperature: Tin plated: -40°C to +105°C
 Gold plated: -55°C to +105°C

order information

B200120	-	xx	xx	xx	xx	xx
No. of Positions		Plating Option	Insulator Height	Packaging	Special Customer	
04~80		01= gold flash	43= H= 4.30mm	A= bag		
		xx= on request	72= H= 7.20mm	C= tube		
			xx= on request	xx= on request		

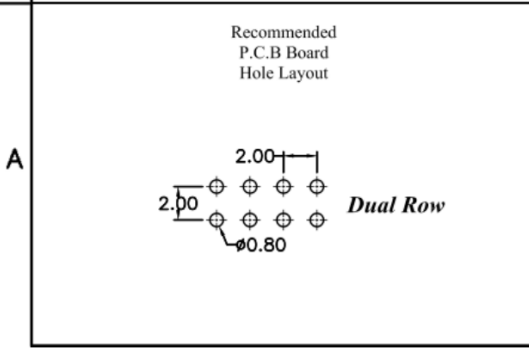

	BRCONNECTORS		Dual Row Female Header Right Angle Type			
	PROJECTON					
	DATE	22.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.:		2160841	
	CHECKED	BR				
APPROVED	BR			UNIT:	SCALE:	SIZE:
				mm		A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.