

4




3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

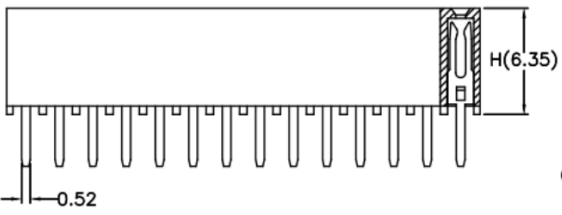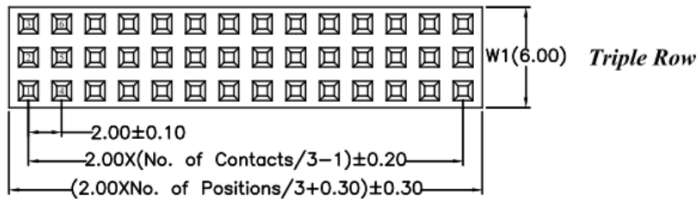



Electrical
Current rating: 1,5Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≧ 1000MΩ at V=100V
Withstanding Voltage: 450V AC/minute

Material
Contact: Brass
Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Tin plated: -40°C to +105°C
 Gold plated: -55°C to +105°C

order information

B200170	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
06~120	01= gold flash	A= bag		
	xx= on request	C= tube		
		xx= on request		

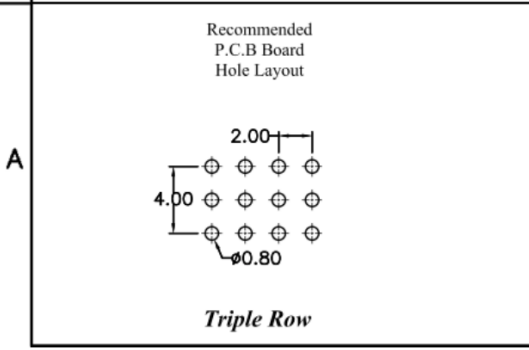

<p>BRCONNECTORS</p> <p>Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X* ±2*</p>	PROJECTON		Triple Row Female Header Straight Type		
	DATE	22.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160839		
	CHECKED	BR			
	APPROVED	BR			
			UNIT: mm	SCALE:	SIZE: A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.