

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR



Electrical
Current rating: 3Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 550V AC/minute

Material
Contact: Phosphor Bronze
Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

order information

B254102	-	XX	XX	XX	XX	XX	-	XX
No. of Positions		Plating Option	Insulator Height	Packaging	Dimension	Special Customer		
04~80		01= gold flash 10= 10µ" gold xx= on request	50= H= 5.00mm 71= H= 7.10mm 85= H= 8.50mm xx= on request	A= bag B= tray C= tube xx= on request	A	xx= on request		

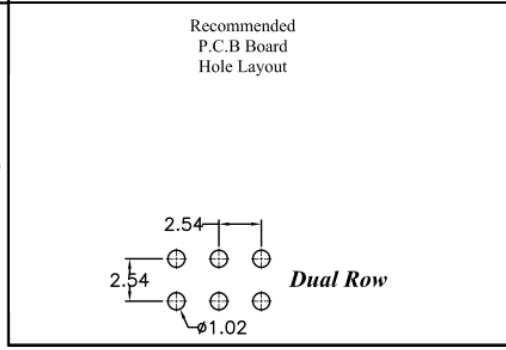

BRCONNECTORS

Dual Row Female Header Straight Type

Tolerance:	X. ±0.50	.X ±0.35	.XX ±0.25	.XXX ±0.05	X° ±2°
PROJECTON		DATE	22.03.2017	Customer Drawing-No.:	
DRAWN	MR	Drawing-No.:	2160871		
CHECKED	BR				
APPROVED	BR			UNIT:	SCALE:
				mm	
				SIZE:	A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.