

4


3

2



1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

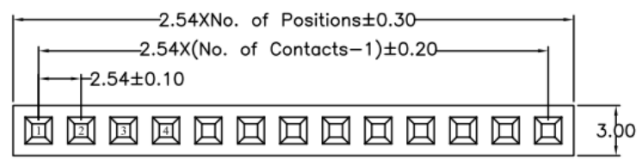

Single Row

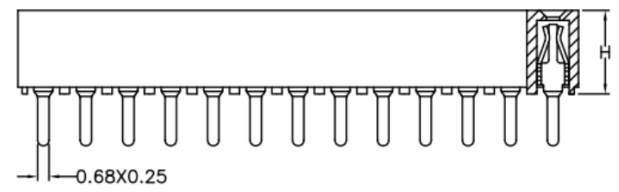

Single Row

Electrical

- Current rating: 3Amps/contact max.
- Contact resistance: ≤ 20mΩ/contact
- Isolation resistance: ≥ 1000MΩ at V=100V
- Withstanding Voltage: 550V AC/minute


Material

- Contact: Phosphor Bronze
- Isolator: High Temperature, Thermoplastic UL94V-0
- Operating temperature: Gold plated: -55°C to +105°C
Tin plated: -40°C to +105°C


order information

8254103	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Insulator Height	Packaging	Special Customer	
02~40	01= gold flash xx= on request	35= H= 3.55mm 50= H= 5.00mm 71= H= 7.10mm 85= H= 8.50mm xx= on request	A= bag C= tube xx= on request		

Recommended P.C.B Board Hole Layout



Single Row



BRCONNECTORS

Single Row Female Header Straight Type

Tolerance:

X.	±0.50
.X	±0.35
.XX	±0.25
.XXX	±0.05
X*	±2*

PROJECTON	
DATE	22.03.2017
DRAWN	MR
CHECKED	BR
APPROVED	BR

Customer Drawing-No.:	
Drawing-No.:	2160870
UNIT:	mm
SCALE:	
SIZE:	A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.