

RoHS  
REACH  
compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR



**Electrical**  
 Current rating: 3Amps/contact max.  
 Contact resistance: ≤ 20mΩ/contact  
 Isolation resistance: ≥ 1000MΩ at V=100V  
 Withstanding Voltage: 550V AC/minute

**Material**  
 Contact: Phosphor Bronze  
 Isolator: High Temperature, Thermoplastic UL94V-0

**Operating temperature:**  
 Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

**order information**

B254107	-	XX	XX	XX	XX	XX	-	XX
No. of Positions		Plating Option	Insulator Height	Packaging	Dimension	Special Customer		
02~40		01= gold flash xx= on request	71= H= 7.10mm xx= on request	A= bag C= tube xx= on request	A	xx= on request		

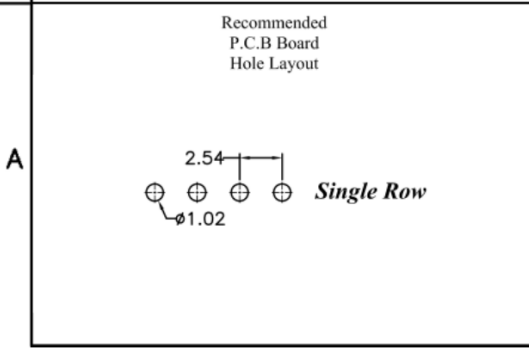

		<b>Single Row Female Header Straight Type</b>	
<b>Tolerance:</b> X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X° ±2°	PROJECTON		
	DATE	22.03.2017	Customer Drawing-No.:
	DRAWN	MR	Drawing-No.: 2160873
	CHECKED	BR	
APPROVED	BR	UNIT: mm	SCALE: SIZE: A4

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.