

4


3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR
	01	new order information	31.10.18	MR


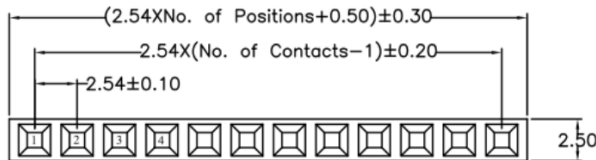


Electrical

- Current rating: 3Amps/contact max.
- Contact resistance: ≤ 20mΩ/contact
- Isolation resistance: ≥ 1000MΩ at V=100V
- Withstanding Voltage: 550V AC/minute

Material

- Contact: Phosphor Bronze
- Isolator: High Temperature, Thermoplastic UL94V-0
- Operating temperature: Gold plated: -55°C to +105°C
Tin plated: -40°C to +105°C


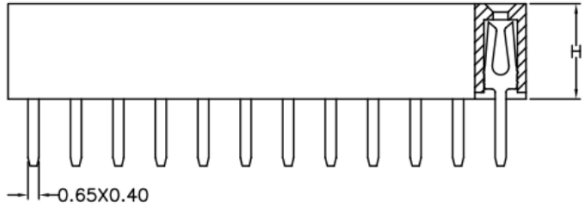


Single Row

order information

B254111	-	XX	XX	XX	XX	XX	-	XX
No. of Positions		Plating Option	Insulator Height	Packaging	Dimension	Special Customer		
02~40		01= gold flash xx= on request	50= H= 5.00mm 57= H= 5.00mm 85= H= 8.50mm xx= on request	A= bag C= tube xx= on request	A xx= on request	xx= on request		

Recommended P.C.B Board Hole Layout



	Single Row Female Header Straight Type	
	PROJECTON	
	DATE	22.03.2017 Customer Drawing-No.:
	DRAWN	MR Drawing-No.: 2160875
	CHECKED	BR
APPROVED	BR	UNIT: mm SCALE: SIZE: A4