

4


3

2



1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

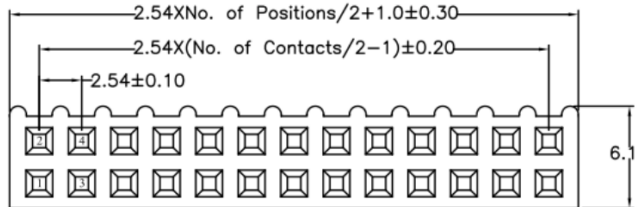

Dual Row

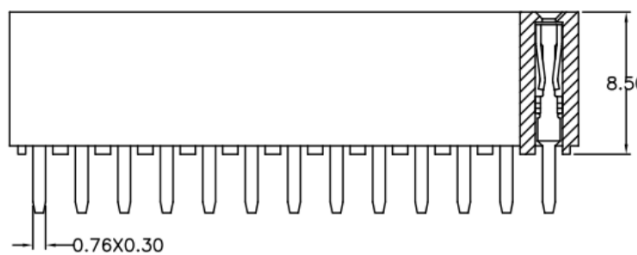

Dual Row

Electrical

- Current rating: 3Amps/contact max.
- Contact resistance: ≤ 20mΩ/contact
- Isolation resistance: ≥ 1000MΩ at V=100V
- Withstanding Voltage: 550V AC/minute


Material

- Contact: Phosphor Bronze
- Isolator: High Temperature, Thermoplastic UL94V-0
- Operating temperature: Gold plated: -55°C to +105°C  
Tin plated: -40°C to +105°C


order information

B254114	xx	xx	xx	xx
No. of Positions	Plating Option	Packaging	Special Customer	
04~80	01= gold flash	A= bag		
	xx= on request	C= tube		
		xx= on request		

Recommended P.C.B Board Hole Layout



Dual Row



BRCONNECTORS

Dual Row Female Header Straight Type

Tolerance:  
 X. ±0.50  
 .X ±0.35  
 .XX ±0.25  
 .XXX ±0.05  
 X\* ±2\*

PROJECTON				
DATE	22.03.2017	Customer Drawing-No.:		
DRAWN	MR	Drawing-No.:		2160874
CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE: A4
		mm		

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.