

4




3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

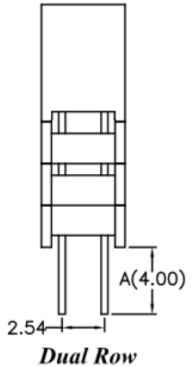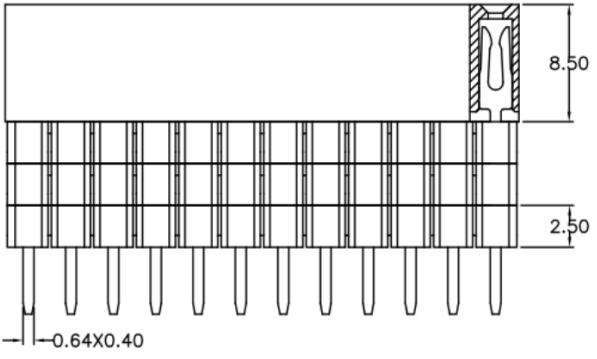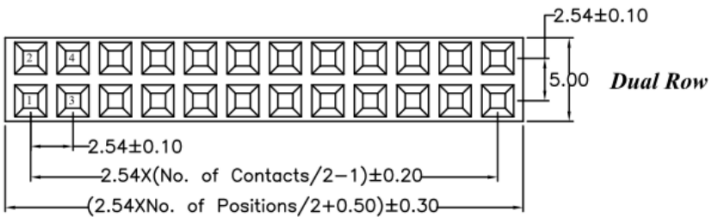

Electrical
Current rating: 3Amps/contact max.
Contact resistance: ≤ 20mΩ/contact
Isolation resistance: ≥ 1000MΩ at V=100V
Withstanding Voltage: 550V AC/minute



Material
Contact: Phosphor Bronze
Isolator: High Temperature, Thermoplastic UL94V-0

Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

order information

B254118	-	xx	xx	xx	xx	xx
No. of Positions	Plating Option	No. of Insulators	Packaging	Special Customer		
04*80	01= gold flash xx= on request	1=1pcs 2=2pcs 3=3pcs 4=4pcs xx=on request	A= bag C= tube xx= on request			

Recommended P.C.B Board Hole Layout



	Dual Row Female Header Straight Type	
	PROJECTON	22.03.2017
	DATE	Customer Drawing-No.: 2160878
	DRAWN	Drawing-No.: 2160878
	CHECKED	BR
APPROVED	BR	UNIT: mm SCALE: SIZE: A4