

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR



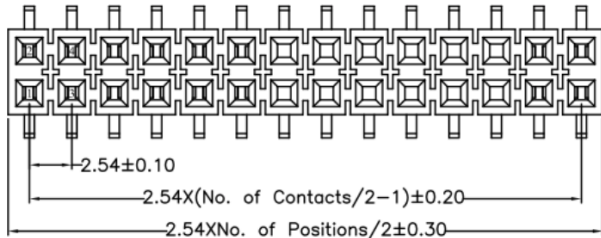


Electrical

Current rating: 3Amps/contact max.  
 Contact resistance:  $\leq 20m\Omega$ /contact  
 Isolation resistance:  $\geq 1000M\Omega$  at V=100V  
 Withstanding Voltage: 550V AC/minute

Material


Contact: Phosphor Bronze  
 Isolator: High Temperature, Thermoplastic UL94V-0  
 Operating temperature: Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

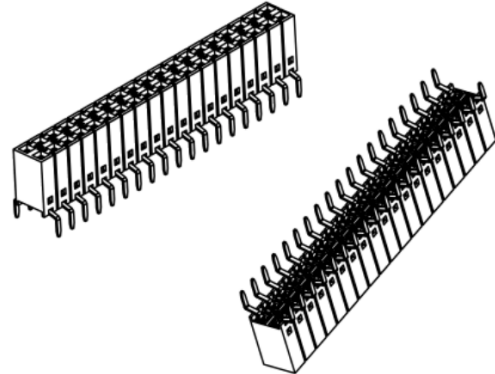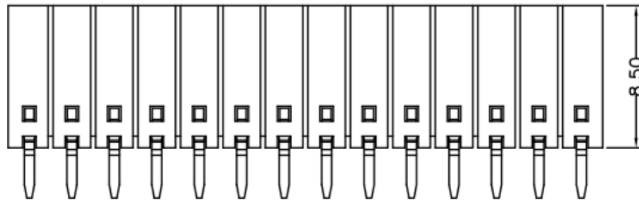

order information

B254120	-	xx	xx	xx	xx
No. of Positions		Plating Option	Packaging	Special Customer	
04~80		01= gold flash	A= bag		
		xx= on request	C= tube		
			xx= on request		

Recommended P.C.B Board Hole Layout



	<b>Dual Row Female Header Straight Type Bottom Entry</b>	
	PROJECTON	
	DATE	22.03.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
	UNIT: mm	SCALE: A4

Tolerance:  
 X. ±0.50  
 .X ±0.35  
 .XX ±0.25  
 .XXX ±0.05  
 X\* ±2\*