

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR

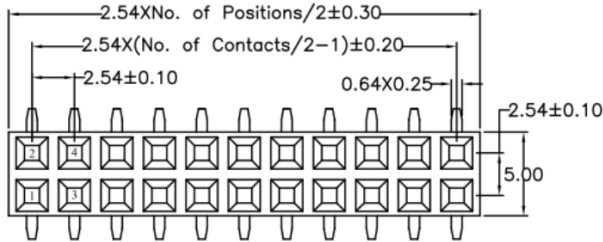


Electrical

Current rating: 3Amps/contact max.
 Contact resistance: ≤ 20mΩ/contact
 Isolation resistance: ≥ 1000MΩ at V=100V
 Withstanding Voltage: 550V AC/minute

Material



Contact: Phosphor Bronze
 Isolator: High Temperature, Thermoplastic UL94V-0
 Operating temperature: Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

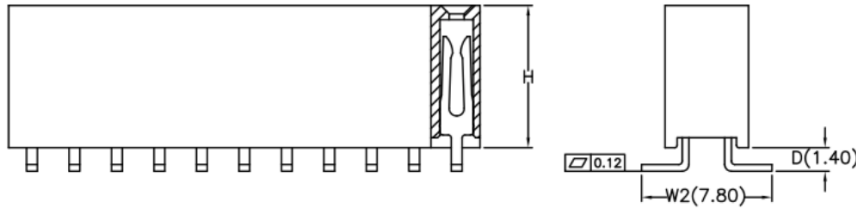

order information

B254158	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Insulator Height	Packaging	Special Customer	
04~80	01= gold flash xx= on request	50= H= 5.00mm 57= H= 5.70mm 85= H= 8.50mm xx= on request	F= tape&reel with cap E= tube&cap xx= on request		

Recommended P.C.B Board Layout



Dual Row Female Header Straight SMT Type

Tolerance: X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05 X* ±2°	PROJECTON				
	DATE	22.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160891		
	CHECKED	BR			
APPROVED	BR				
		UNIT:	SCALE:	SIZE:	A4
		mm			