

RoHS  
REACH  
compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	22.03.17	MR



**Electrical**  
 Current rating: 3Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Isolation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 550V AC/minute

**Material**  
 Contact: Phosphor Bronze  
 Isolator: High Temperature, Thermoplastic UL94V-0

**Operating temperature:**  
 Gold plated: -55°C to +105°C  
 Tin plated: -40°C to +105°C

order information

B254176	-	xx	xx	xx	-	xx
No. of Positions		Plating Option	Packaging			Special Customer
06~120		01= gold flash	A= bag			
		xx= on request	C= tube			
			xx= on request			

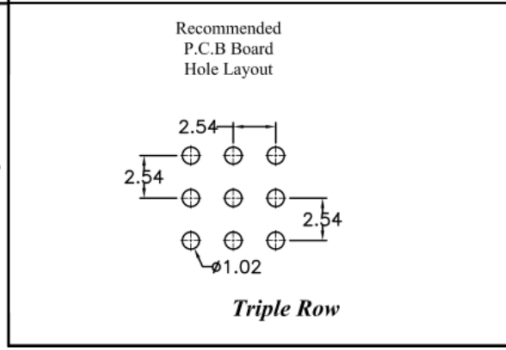

	<b>BRCONNECTORS</b>		<b>Triple Row Female Header Straight Type</b>			
	PROJECTON					
	DATE	22.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2160876			
	CHECKED	BR				
APPROVED	BR			UNIT: mm	SCALE: A4	

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.