


RoHS REACH compliant

| REVISION DATA | | | | |
|---------------|-----|-------------|----------|-------|
| SYM | REV | DESCRIPTION | DATE | APPR. |
| | 00 | new part | 22.03.17 | MR |
| | | | | |
| | | | | |
| | | | | |

Electrical
 Current rating: 1,5Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Isolation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 450V AC/minute

Material
 Contact: Phosphor Bronze
 Isolator: High Temperature, Thermoplastic UL94V-0


Operating temperature:
 Gold plated: -55°C to +105°C
 Tin plated: -40°C to +105°C

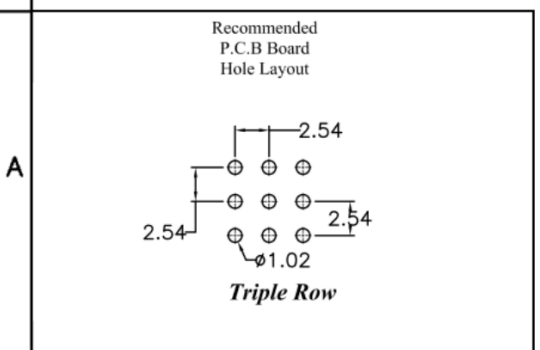

order information

| | | | | |
|------------------|----------------|----------------|------------------|----|
| B254178 | xx | xx | xx | xx |
| No. of Positions | Plating Option | Packaging | Special Customer | |
| 06~120 | 01= gold flash | A= bag | | |
| | xx= on request | C= tube | | |
| | | xx= on request | | |

| | | | | | |
|----------|---------------------|------------|--|----------|--|
| | BRCONNECTORS | | Triple Row Female Header Right Angle Type | | |
| | PROJECTON | | | | |
| | DATE | 22.03.2017 | Customer Drawing-No.: | | |
| | DRAWN | MR | Drawing-No.: 2160882 | | |
| | CHECKED | BR | | | |
| APPROVED | BR | | | | |
| | | UNIT: | SCALE: | SIZE: A4 | |
| | | mm | | | |



Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.