

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

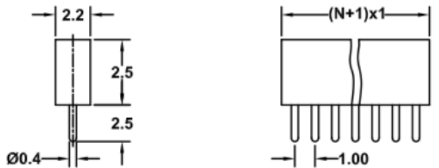


Technical Spezifications

Insulator: Black glass filled polyester PPS+GF30  
 Flammability: UL 94V-0  
 Sleeve: Brass CuZn36Pb3(C36000)  
 Contact Clip (4 finger): Beryllium copper (C17200)  
 Mating Pin Ø: 0.40mm  
 Forces: (polished steel gauge Ø 0.40mm)  
 Insertion: 0.25 N typ.  
 Withdrawal: 0.15 N typ.  
 Mechanical Life: Min. 500 cycles  
 Rated Current: 1 A  
 Dielectric Steength: Min. 500V<sub>RMS</sub>

order information

BP100101	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
02~50	100= tin	01= gold flash	C= tube		
	xx= on request	xx= on request	xx= on request		



	<b>BRCONNECTORS</b>		<b>Single Row Precision Female Header Straight Type</b>			
	PROJECTON					
	DATE	30.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2160906			
	CHECKED	BR				
APPROVED	BR			UNIT: mm	SCALE:	SIZE: A4

Tolerance:  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.05  
 X\* ±2"