

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

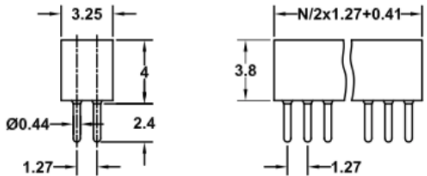


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin ϕ : 0.38 to 0.50mm
- Forces: (polished steel gauge ϕ 0.41mm)
 - Insertion: 0.5 N typ.
 - Withdrawal: 0.2 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 1 A
- Contact Resistance: Max. 20m Ω
- Dielectric Steength: Min. 500V_{RMS}

order information

BP127104	XX	XX	XX	XX	XX
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
04~100	100= tin	01= gold flash	C= tube		
	xx= on request	xx= on request	xx= on request		



	PROJECTON		Dual Row Precision Female Header Straight Type		
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160925		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4

Tolerance:
 X. \pm 0.50
 .X \pm 0.30
 .XX \pm 0.20
 .XXX \pm 0.05
 X* \pm 2"

D
C
B
A

D
C
B

4

3

2

1