

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

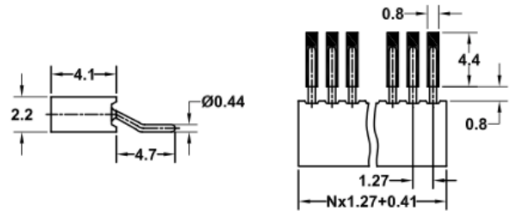


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin Ø: 0.35 to 0.50mm
- Forces: (polished steel gauge Ø 0.41mm)
  - Insertion: 0.5 N typ.
  - Withdrawal: 0.2 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 1 A
- Contact Resistance: Max. 20mΩ
- Dielectric Steength: Min. 500V<sub>RMS</sub>
- Complanariny SMD Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

BP127155	-	xx	xx	xx	xx	-	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer			
02-50	100= tin	01= gold flash	F= tape&reel with cap				
	xx= on request	xx= on request	xx= on request				



	<b>BRCONNECTORS</b>		<b>Single Row Precision Female Header Right Angle SMT Type</b>			
	PROJECTON					
	DATE	30.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2160934			
	CHECKED	BR				
APPROVED	BR			UNIT: mm	SCALE:	SIZE: A4

Tolerance:  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.05  
 X\* ±2"