

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

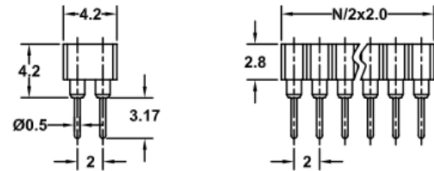


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin ϕ : 0.40 to 0.66mm or 0.50SQ
- Forces: (polished steel gauge ϕ 0.46mm)
- Insertion: 0.7 N typ.
- Withdrawal: 0.4 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10m Ω
- Dielectric Steength: Min. 1000V_{RMS}

order information

BP200104	XX	XX	XX	XX	XX
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
04~80	100= tin	01= gold flash	C= tube		
	xx= on request	xx= on request	xx= on request		



	Dual Row Precision Female Header Straight Type		
	PROJECTON		
	DATE	30.03.2017	
	DRAWN	MR	
	CHECKED	BR	
APPROVED	BR		
	UNIT:	SCALE:	SIZE:
	mm		A4

Tolerance:
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.05
 X" $\pm 2"$