

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

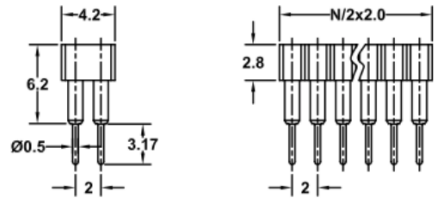


Technical Specifications

Insulator: Black glass filled polyester PPS+GF30
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3(C36000)
 Contact Clip (4 finger): Beryllium copper (C17200)
 Mating Pin ϕ : 0.40 to 0.66mm or 0.50SQ
 Forces: (polished steel gauge ϕ 0.46mm)
 Insertion: 0.7 N typ.
 Withdrawal: 0.4 N typ.
 Mechanical Life: Min. 500 cycles
 Rated Current: 3 A
 Contact Resistance: Max. 10m Ω
 Dielectric Steength: Min. 1000V_{RMS}

order information

BP200106	-	xx	-	xx	-	xx	-	xx	-	xx
No. of Positions		Pin Plating Option		Clip Plating Option		Packaging		Special Customer		
04~80		100= tin		01= gold flash		C= tube				
		xx= on request		xx= on request		xx= on request				

	Dual Row Precision Female Header Straight Type		
	PROJECTON		
	DATE	30.03.2017	
	DRAWN	MR	
	CHECKED	BR	
APPROVED	BR		
	UNIT:	SCALE:	SIZE:
	mm		A4



Tolerance:
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.05
 X* $\pm 2^{\circ}$