

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

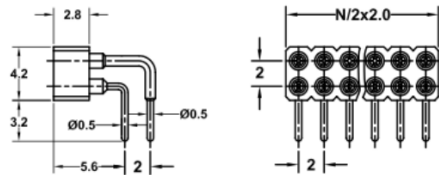


Technical Spezifications

- Insulator: Black glass filled polyester PP5+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin ϕ : 0.40 to 0.66mm or 0.50SQ
- Forces: (polished steel gauge ϕ 0.46mm)
 - Insertion: 0.7 N typ.
 - Withdrawal: 0.4 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10m Ω
- Dielectric Steength: Min. 1000VRMS

order information

BP200120	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
04~80	100= tin	01= gold flash	C= tube		
	xx= on request	xx= on request	xx= on request		



	Dual Row Precision Female Header Right Angle Type	
	PROJECTON	
	DATE	30.03.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
Tolerance: X. \pm 0.50 .X \pm 0.30 .XX \pm 0.20 .XXX \pm 0.05 X* \pm 2"		Customer Drawing-No.: Drawing-No.: 2160954
		UNIT: mm SCALE: SIZE: A4