

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

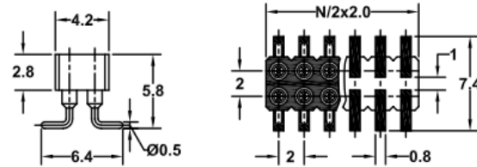


Technical Specifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin Ø: 0.40 to 0.56mm or 0.50SQ
- Forces: (polished steel gauge Ø 0.46mm)
- Insertion: 0.7 N typ.
- Withdrawal: 0.4 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Strength: Min. 1000V<sub>RMS</sub>
- Complanariny SMD Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

BP200150	-	xx	xx	xx	xx	xx
No. of Positions		Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
04-80		100= tin	01= gold flash	F= tape&reel with cap		
		xx= on request	xx= on request	xx= on request		



	<b>Dual Row Precision Female Header Straight SMT Type</b>	
	PROJECTON	
	DATE	30.03.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
Tolerance: X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.05 X* ±2"		Customer Drawing-No.: Drawing-No.: 2160956
		UNIT: mm SCALE: SIZE: A4