

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

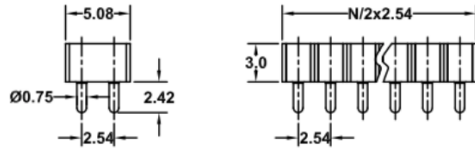


Technical Spezifications

Insulator: Black glass filled polyester PPS+GF30
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3(C36000)
 Contact Clip (4 finger): Beryllium copper (C17200)
 Mating Pin Ø: 0.40 to 0.52mm
 Forces: (polished steel gauge Ø 0.43mm)
 Insertion: 3 N typ.
 Withdrawal: 1.5 N typ.
 Mechanical Life: Min. 500 cycles
 Rated Current: 1 A
 Contact Resistance: Max. 10mΩ
 Dielectric Steength: Min. 1000V_{RMS}

order information

BP254104	-	xx	xx	xx	xx	xx
No. of Positions		Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
02~80		100= tin	01= gold flash	C= tube		
		xx= on request	xx= on request	xx= on request		



	PROJECTON		Dual Row Precision Female Header Straight Type		
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2160995		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X" ±2"