

4


3

2

1

RoHS REACH compliant

| REVISION DATA | | | | |
|---------------|-----|-------------|----------|-------|
| SYM | REV | DESCRIPTION | DATE | APPR. |
| | 00 | new part | 30.03.17 | MR |
| | | | | |
| | | | | |
| | | | | |

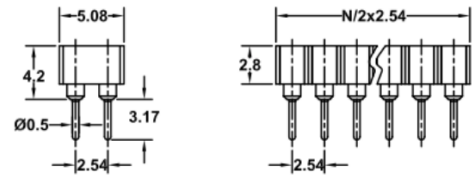


Technical Spezifications

Insulator: Black glass filled polyester PPS+GF30
 Flammability: UL 94V-0
 Sleeve: Brass CuZn36Pb3(C36000)
 Contact Clip (4 finger): Beryllium copper (C17200)
 Mating Pin ϕ : 0.40 to 0.56mm
 Forces: (polished steel gauge ϕ 0.43mm)
 Insertion: 2 N typ.
 Withdrawal: 1 N typ.
 Mechanical Life: Min. 500 cycles
 Rated Current: 3 A
 Contact Resistance: Max. 10m Ω
 Dielectric Steength: Min. 1000V_{RMS}

order information

| | | | | | |
|------------------|--------------------|---------------------|----------------|------------------|----|
| BP254106 | XX | XX | XX | XX | XX |
| No. of Positions | Pin Plating Option | Clip Plating Option | Packaging | Special Customer | |
| 04~72 | 100= tin | 01= gold flash | C= tube | | |
| | xx= on request | xx= on request | xx= on request | | |



| | | | | | |
|--|------------------|------------|---|---------------|--------------------|
| | PROJECTON | | Dual Row Precision Female Header Straight Type | | |
| | DATE | 30.03.2017 | Customer Drawing-No.: | | |
| | DRAWN | MR | Drawing-No.: 2160997 | | |
| | CHECKED | BR | | | |
| | APPROVED | BR | UNIT: mm | SCALE: | SIZE: A4 |

A

B

C

D

B

C

D

4

3

2

1