

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

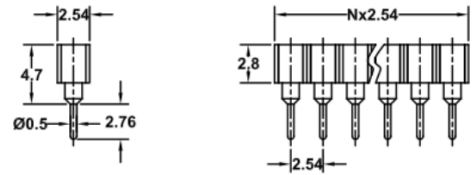

Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin Ø: 0.40 to 0.56mm
- Forces: (polished steel gauge Ø 0.43mm)
- Insertion: 2 N typ.
- Withdrawal: 1 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Steength: Min. 1000V_{RMS}

order information

BP254107	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
02~40	100= tin	01= gold flash	C= tube		
	xx= on request	xx= on request	xx= on request		



	BRCONNECTORS		Single Row Precision Female Header Straight Type			
	PROJECTON					
	DATE	30.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2160998			
	CHECKED	BR				
APPROVED	BR		UNIT: mm	SCALE:	SIZE: A4	

A

D

C

B

D

C

B

4

3

2

1