

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

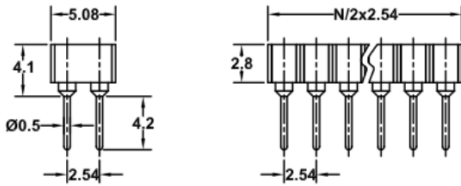


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin Ø: 0.40 to 0.56mm
- Forces: (polished steel gauge Ø 0.43mm)
 - Insertion: 2 N typ.
 - Withdrawal: 1 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Steength: Min. 1000V_{RMS}

order information

BP254110	-	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer		
04~72	100= tin	01= gold flash	C= tube			
	xx= on request	xx= on request	xx= on request			



	PROJECTON		Dual Row Precision Female Header Straight Type		
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161001		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4

Tolerance:
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.05
 X* ±2"