

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

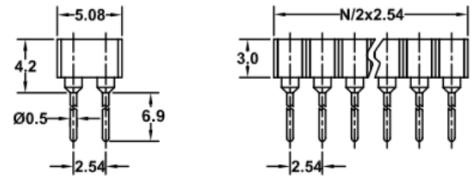


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin \varnothing : 0.40 to 0.56mm
- Forces: (polished steel gauge \varnothing 0.43mm)
 - Insertion: 2 N typ.
 - Withdrawal: 1 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10m Ω
- Dielectric Steength: Min. 1000V_{RMS}

order information

BP254112	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer	
04-72	100= tin	01= gold flash	C= tube		
	xx= on request	xx= on request	xx= on request		



	Dual Row Precision Female Header Straight Type	
	PROJECTON	
	DATE	30.03.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
	UNIT: mm	SCALE: A4

Tolerance:
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.05
 X* $\pm 2^{\circ}$

D

C

B

A

D

C

B

4

3

2

1