

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

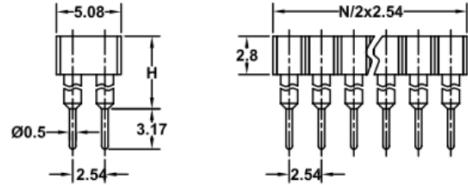


Technical Spezifications

Insulator: Black glass filled polyester PPS+GF30  
 Flammability: UL 94V-0  
 Sleeve: Brass CuZn36Pb3(C36000)  
 Contact Clip (4 finger): Beryllium copper (C17200)  
 Mating Pin  $\phi$ : 0.40 to 0.56mm  
 Forces: (polished steel gauge  $\phi$  0.43mm)  
 Insertion: 2 N typ.  
 Withdrawal: 1 N typ.  
 Mechanical Life: Min. 500 cycles  
 Rated Current: 3 A  
 Contact Resistance: Max. 10m $\Omega$   
 Dielectric Steength: Min. 1000V<sub>RMS</sub>

order information

BP254114	xx	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Length	Packaging	Special Customer	
02-80	100= tin xx= on request	01= gold flash xx= on request	090= L= 9.0mm 146= L= 14.6mm xx= on request	C= tube xx= on request		



	<b>Dual Row Precision Female Header Straight Type</b>	
	PROJECTON	
	DATE	30.03.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
	UNIT:	SCALE:
	mm	
	SIZE:	A4

Tolerance:  
 X.  $\pm$ 0.50  
 .X  $\pm$ 0.30  
 .XX  $\pm$ 0.20  
 .XXX  $\pm$ 0.05  
 X"  $\pm$ 2"