

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

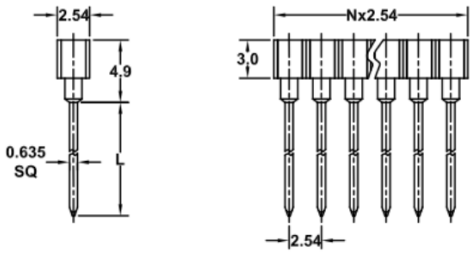


Technical Specifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin  $\phi$ : 0.40 to 0.56mm
- Forces: (polished steel gauge  $\phi$  0.43mm)
- Insertion: 2 N typ.
- Withdrawal: 1 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10m $\Omega$
- Dielectric Steength: Min. 1000V<sub>RMS</sub>

order information

BP254117	xx	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Length	Packaging	Special Customer	
01~40	100= tin	01= gold flash	094= L= 9.4mm	C= tube		
	xx= on request	xx= on request	129= L= 12.9mm	xx= on request		
			xx= on request			



	<b>BRCONNECTORS</b>		<b>Single Row Precision Female Header Straight Type</b>			
	PROJECTON					
	DATE	30.03.2017	Customer Drawing-No.:			
	DRAWN	MR	Drawing-No.: 2161008			
	CHECKED	BR				
APPROVED	BR			UNIT: mm	SCALE:	SIZE: A4

Tolerance:  
 X.  $\pm 0.50$   
 .X  $\pm 0.30$   
 .XX  $\pm 0.20$   
 .XXX  $\pm 0.05$   
 X\*  $\pm 2^{\circ}$