

4


3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	15.05.17	MR

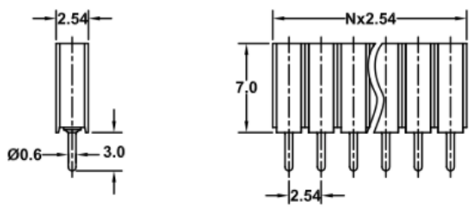


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin \varnothing : 0.7 to 0.9mm or 0.635SQ
- Forces: (polished steel gauge \varnothing 0.76mm)
- Insertion: 1.2 N typ.
- Withdrawal: 0.6 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10m Ω
- Dielectric Steength: Min. 1000VRMS

order information

BP254121	-	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer		
01~40	100= tin	01= gold flash	C= tube			
	xx= on request	xx= on request	xx= on request			



	Single Row Precision Female Header Straight Type	
	PROJECTON	
	DATE	15.05.2017
	DRAWN	MR
	CHECKED	BR
APPROVED	BR	
Tolerance: X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.05 X* $\pm 2^{\circ}$		Customer Drawing-No.: Drawing-No.: 2161060
		UNIT: mm SCALE: SIZE: A4

D

C

B

A

D

C

B