

4


3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

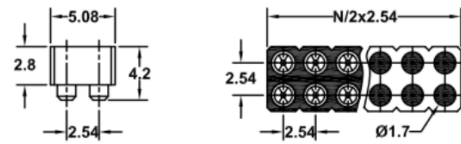

Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin Ø: 0.7 to 0.9mm or 0.635SQ
- Forces: (polished steel gauge Ø 0.76mm)
 - Insertion: 1.2 N typ.
 - Withdrawal: 0.6 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10mΩ
- Dielectric Steength: Min. 1000VRMS
- Complanariny SMD
- Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

BP254156	-	XX	XX	XX	XX	XX
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer		
04~64	100= tin	01= gold flash	F= tape&reel with cap			
	xx= on request	xx= on request	xx= on request			



Dual Row Precision Female Header Straight SMT Type

Tolerance: X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ±0.05 X" ±2"	PROJECTON				
	DATE	30.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161028		
	CHECKED	BR			
	APPROVED	BR	UNIT:	SCALE:	SIZE:
		mm		A4	