

4


3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	30.03.17	MR

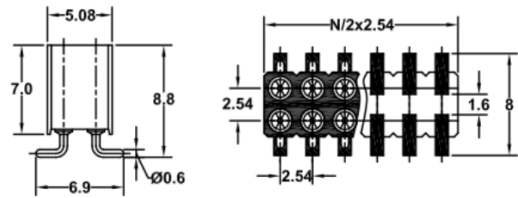


Technical Spezifications

- Insulator: Black glass filled polyester PPS+GF30
- Flammability: UL 94V-0
- Sleeve: Brass CuZn36Pb3(C36000)
- Contact Clip (4 finger): Beryllium copper (C17200)
- Mating Pin ϕ : 0.7 to 0.9mm or 0.635SQ
- Forces: (polished steel gauge ϕ 0.76mm)
 - Insertion: 1.2 N typ.
 - Withdrawal: 0.6 N typ.
- Mechanical Life: Min. 500 cycles
- Rated Current: 3 A
- Contact Resistance: Max. 10m Ω
- Dielectric Steength: Min. 1000V_{RMS}
- Complanariny SMD
- Terminations: Max. 0.1mm (measured on 25mm long connectors)

order information

BP254158	-	xx	xx	xx	xx	xx
No. of Positions	Pin Plating Option	Clip Plating Option	Packaging	Special Customer		
04~80	100= tin xx= on request	01= gold flash xx= on request	F= tape&reel with cap xx= on request			



Dual Row Precision Female Header Straight SMT Type

Tolerance: X. \pm 0.50 .X \pm 0.30 .XX \pm 0.20 .XXX \pm 0.05 X" \pm 2"	PROJECTON		
	DATE	30.03.2017	Customer Drawing-No.:
	DRAWN	MR	Drawing-No.: 2161030
	CHECKED	BR	
	APPROVED	BR	

UNIT: mm SCALE: SIZE: A4