

4

3

2

1




RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR

Technical Specification


Current Rating: 1A AC, DC  
 Voltage Rating: 200V AC, DC  
 Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
 Contact Resistance: 40mΩ  
 Insulation Resistance: 100MΩ  
 Withstanding Voltage: 500V AC/minute  
 Material Pin: Phosphor Bronze  
 Material: Thermoplastic, UL94V-0  
 Material Shell: Phosphor Bronze

Circuit No.	Dimensions	
	A	B
21P	12.50	16.55
31P	18.75	22.80
41P	25.00	29.05

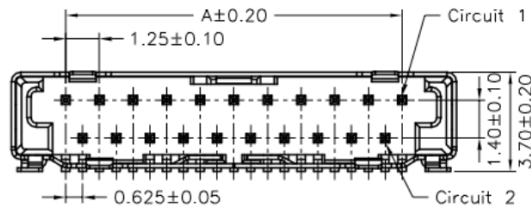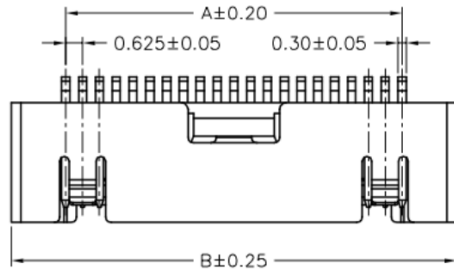


order information

C125409	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Special	Packaging	Special Customer	
21~41	01= gold flash	B2= side	E4= locking	D= tape&reel	xx= on request	
xx= on request	100= tin			xx= on request		
	xx= on request					

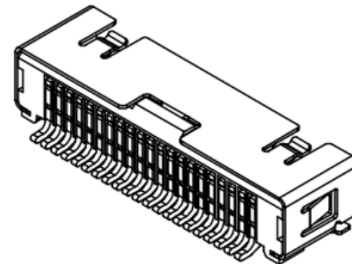

	PROJECTON		Dual Row Wafer SMT Type, Side Entry		
	DATE	19.06.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161162		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4
		mm			

Tolerance:  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.05

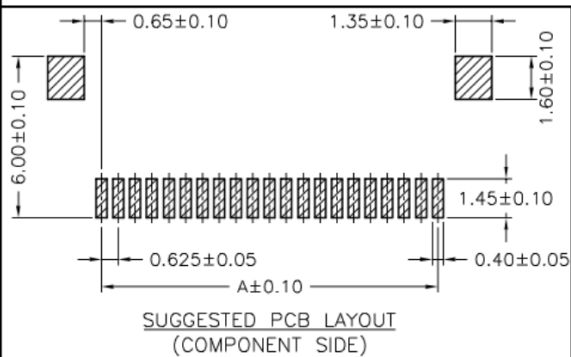

4

3

2

1