



RoHS
REACH
compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR

Technical Specification



Current Rating: 1A AC, DC
 Voltage Rating: 200V AC,DC
 Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
 Contact Resistance: 40mΩ
 Insulation Resistance: 100MΩ
 Withstanding Voltage: 500V AC/minute
 Material Pin: Phosphor Bronze
 Material: Thermoplastic, UL94V-0
 Material Shell: Phosphor Bronze

Circuit No.	Dimensions		
	A	B	C
21P	12.50	16.85	11.25
31P	18.75	23.10	17.50

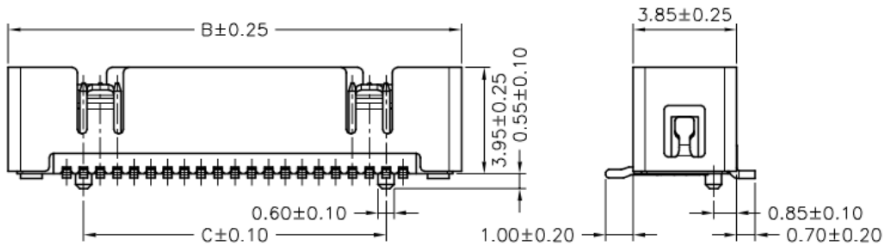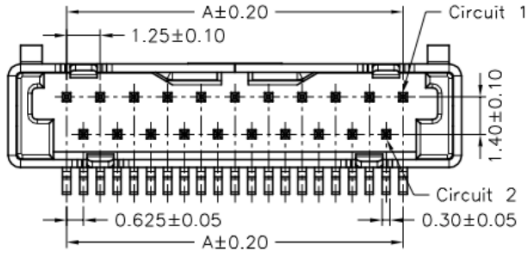

order information

C125409	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Peg	Packaging	Special Customer	
21~31	01= gold flash	B1= top	C2= with	F= tape&reel with cap	xx= on request	
xx= on request	100= tin			xx= on request		
				xx= on request		

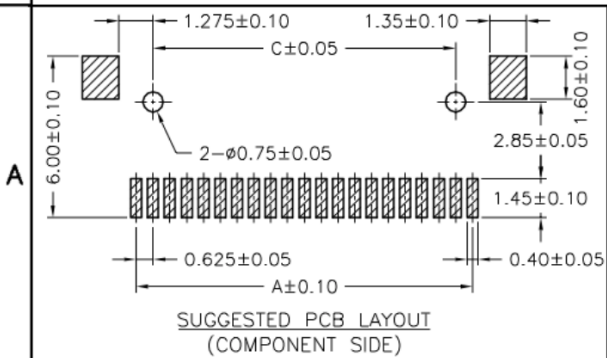

	PROJECTON		Dual Row Wafer SMT Type, Top Entry		
	DATE	19.06.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161165		
	CHECKED	BR			
	APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4