

4



3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR

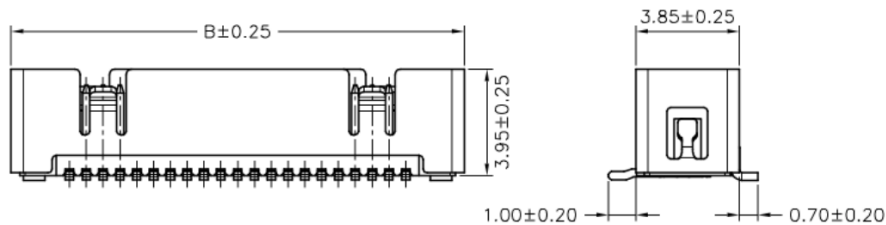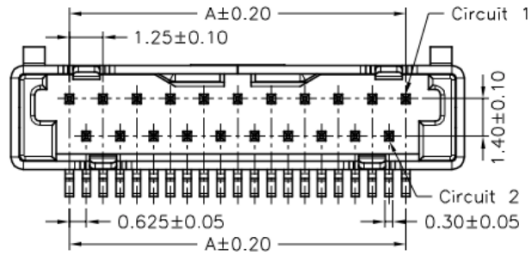


**Technical Specification**

Current Rating: 1A AC, DC  
Voltage Rating: 200V AC,DC  
Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
Contact Resistance: 40mΩ  
Insulation Resistance: 100MΩ  
Withstanding Voltage: 500V AC/minute  
Material Pin: Phosphor Bronze  
Material: Thermoplastic, UL94V-0  
Material Solder Tabs: Brass  
Material Shell: Phosphor Bronze


Circuit No.	Dimensions	
	A	B
21P	12.50	16.85
31P	18.75	23.10

**order information**

C125409	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Peg	Packaging	Special Customer	
21~31	01= gold flash	B1= top	C1= without	F= tape&reel with cap	xx= on request	
xx= on request	100= tin			xx= on request		
						xx= on request

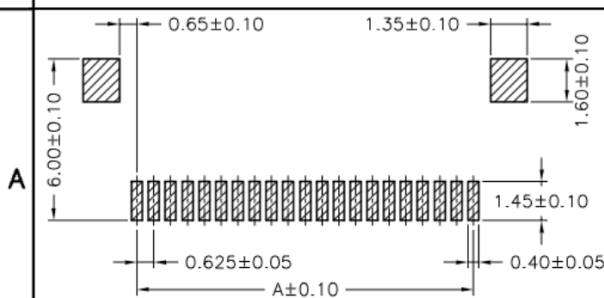

**SUGGESTED PCB LAYOUT (COMPONENT SIDE)**



	<b>PROJECTON</b>		<b>Dual Row Wafer SMT Type, Top Entry</b>		
	<b>DATE</b>	19.06.2017	Customer Drawing-No.:		
	<b>DRAWN</b>	MR	Drawing-No.: 2161161		
	<b>CHECKED</b>	BR			
<b>APPROVED</b>	BR	<b>UNIT:</b> mm	<b>SCALE:</b>	<b>SIZE:</b> A4	