

4

3

2

1




| REVISION DATA | | | | |
|---------------|-----|-----------------------|----------|-------|
| SYM | REV | DESCRIPTION | DATE | APPR. |
| | 00 | new part | 19.07.16 | JU |
| | 01 | new Order Information | 26.09.18 | MR |
| | | | | |
| | | | | |

technical specification

Current Rating: 1A AC, DC
Voltage Rating: 100V AC,DC
Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ
Withstanding Voltage: 500V AC/ Min.
Material Pin: Brass
Material: UL94V-0




Dimension:

A = (No. of Pos. -1) x 1.50
B = A + 4.50
C = A + 2.10

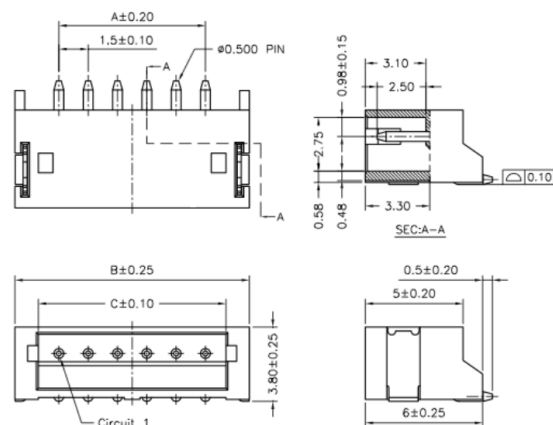

order information

| | | | | | | |
|------------------|--|---------|----------|---|------------------|----|
| C150401 | XX | XX | XX | XX | XX | XX |
| No. of Positions | Plating Option | Type | Entry | Packaging | Special Customer | |
| 02~13 | 01= gold flash 100= tin xx= on request | A1= SMT | B2= side | D= tape&reel F= tape&reel with cap xx= on request | xx= on request | |

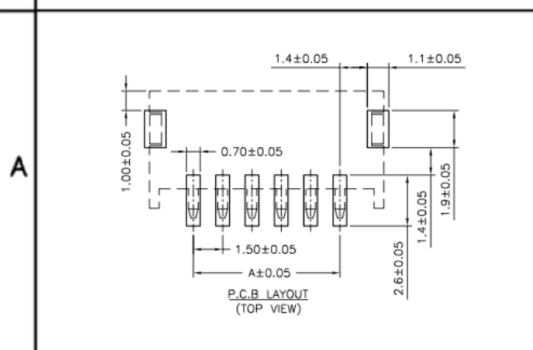

| | | | |
|-------------|-----------|--|--------------------------|
| | | Single Row Wafer SMT Type, Side Entry | |
| TOLERANCE: | PROJECTON | | |
| ANGLE ±5° | DATE | 19.07.16 | Customer Drawing- No.: |
| X.XXX ±0.05 | DRAWN | MR | Drawing- No.: 2160764 |
| X.XX ±0.15 | CHECKED | JU | |
| X.X ±0.20 | APPROVED | JU | |
| X. ±0.35 | | | UNIT: mm SCALE: SIZE: A4 |