

4

3

2

1






REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR

Technical Specification



Current Rating: 3A AC, DC
Voltage Rating: 350V AC,DC
Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
Contact Resistance: 20mΩ
Insulation Resistance: 1000MΩ
Withstanding Voltage: 500V AC/minute
Material Pin: Brass
Material: Thermoplastic, UL94V-0

Circuit NO.	Dimensions	
	A	B
02P	1.50	4.30
03P	3.00	5.80
04P	4.50	7.30
05P	6.00	8.80
06P	7.50	10.30
07P	9.00	11.80
08P	10.50	13.30
09P	12.00	14.80
10P	13.50	16.30
11P	15.00	17.80
12P	16.50	19.30
13P	18.00	20.80
14P	19.50	22.30
15P	21.00	23.80

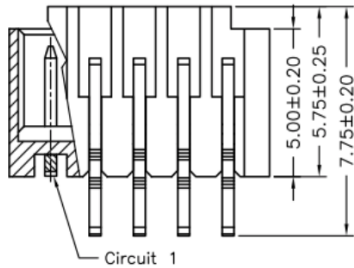

order information

C150402	XX	XX	XX	XX	XX
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~15	01= gold flash	B2= side	D= tape&reel	xx= on request	
xx= on request	100= tin		xx= on request		
				xx= on request	

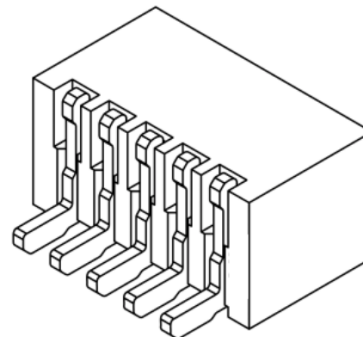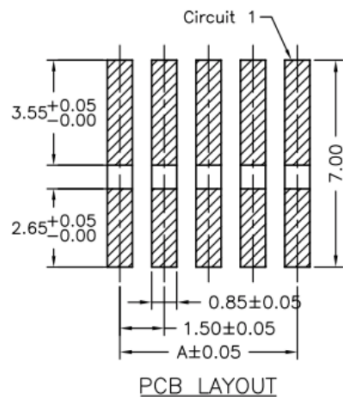

	PROJECTON		Single Row Wafer SMT Type, Side Entry		
	DATE	10.03.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161190		
	CHECKED	BR			
APPROVED	BR	UNIT: mm	SCALE:	SIZE: A4	