

4

3

2

1



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.07.16	JU
	01	new Order-Code	03.08.17	MR

**technical specification**

Current Rating: 2A AC, DC  
Voltage Rating: 100V AC,DC  
Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
Contact Resistance: 10mΩ  
Insulation Resistance: 1000MΩ  
Withstanding Voltage: 800V AC/minute  
Material Pin: Brass  
Material: UL94V-0

**Dimension:**

A = (No. of Pos. x 2) - 2  
B = A + 4.00  
C = A + 2.72

D





C

B

D

C




B

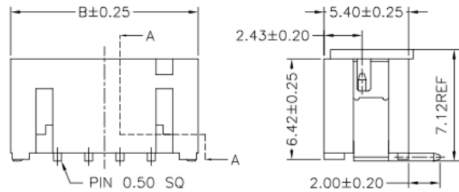

**order information**

<b>C200401</b>	xx	xx	xx	xx	xx	xx
<b>No. of Positions</b>	<b>Plating Option</b>	<b>Type</b>	<b>Entry</b>	<b>Packaging</b>	<b>Special Customer</b>	
02~18	01= gold flash 100= tin xx= on request	A1= SMT	B1= top	D= tape&reel F= tape&reel with cap xx= on request	xx= on request	

A



		<b>Single Row Wafer SMT Type, Top Entry</b>	
<b>TOLERANCE:</b>	<b>PROJECTON</b>		
<b>ANGLE ±5°</b>	<b>DATE</b>	19.07.16	<b>Customer Drawing- No.:</b>
<b>X.XXX ±0.05</b>	<b>DRAWN</b>	MR	<b>Drawing- No.:</b> 2160754
<b>X.XX ±0.15</b>	<b>CHECKED</b>	BR	
<b>X.X ±0.20</b>	<b>APPROVED</b>	BR	
<b>X. ±0.35</b>			<b>UNIT:</b> mm <b>SCALE:</b> <b>SIZE:</b> A4

4

3

2

1