

RoHS REACH compliant


REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR

**Technical Specification**

Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC, DC  
 Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
 Contact Resistance: 10mΩ  
 Insulation Resistance: 1000MΩ  
 Withstanding Voltage: 800V AC/minute  
 Material Pin: Brass  
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions			
	A	B	C	D
2X02P	2.00	6.00	4.70	---
2X03P	4.00	8.00	6.70	2.00
2X04P	6.00	10.00	8.70	4.00
2X05P	8.00	12.00	10.70	6.00
2X06P	10.00	14.00	12.70	8.00
2X07P	12.00	16.00	14.70	10.00
2X08P	14.00	18.00	16.70	12.00
2X09P	16.00	20.00	18.70	14.00
2X10P	18.00	22.00	20.70	16.00
2X11P	20.00	24.00	22.70	18.00


Circuit No.	Dimensions			
	A	B	C	D
2X12P	22.00	26.00	24.70	20.00
2X13P	24.00	28.00	26.70	22.00
2X14P	26.00	30.00	28.70	24.00
2X15P	28.00	32.00	30.70	26.00
2X16P	30.00	34.00	32.70	28.00
2X17P	32.00	36.00	34.70	30.00
2X18P	34.00	38.00	36.70	32.00
2X19P	36.00	40.00	38.70	34.00
2X20P	38.00	42.00	40.70	36.00

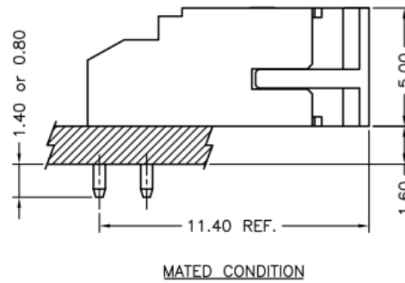

MATED CONDITION


**order information**

C200404	xx	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Locking	Packaging	Special Customer	
04~40	01= gold flash	B2= side	F1= without	A= bag	xx= on request	
xx= on request	100= tin			xx= on request		
	xx= on request					







	<b>PROJECTON</b>		<b>Dual Row Wafer</b>		
	<b>DATE</b> 19.06.2017		<b>THT Type, Side Entry</b>		
	<b>DRAWN</b> MR		Customer Drawing-No.:		
	<b>CHECKED</b> BR		Drawing-No.: 2161209		
<b>APPROVED</b> BR		<b>UNIT:</b> mm		<b>SCALE:</b>	<b>SIZE:</b> A4

Tolerance:  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.05

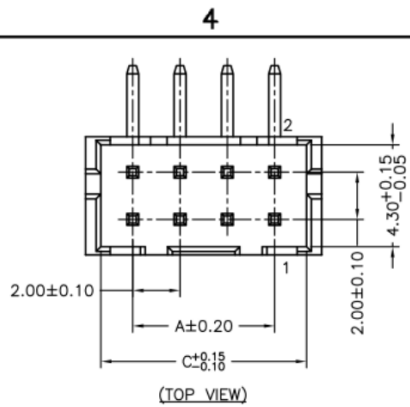

(TOP VIEW)

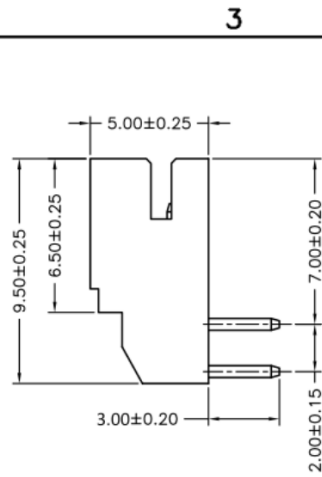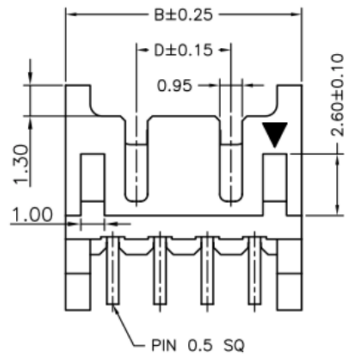

P.C.B LAYOUT (TOP VIEW)