



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	19.06.17	MR





**Technical Specification**

Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC,DC  
 Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
 Contact Resistance: 30mΩ  
 Insulation Resistance: 1000MΩ  
 Withstanding Voltage: 650V AC/minute  
 Material Pin: Brass  
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02P	2.00	6.00
03P	4.00	8.00
04P	6.00	10.00
05P	8.00	12.00
06P	10.00	14.00
07P	12.00	16.00
08P	14.00	18.00
09P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00

**order information**

C200405	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02-15	01= gold flash	B1= top	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		

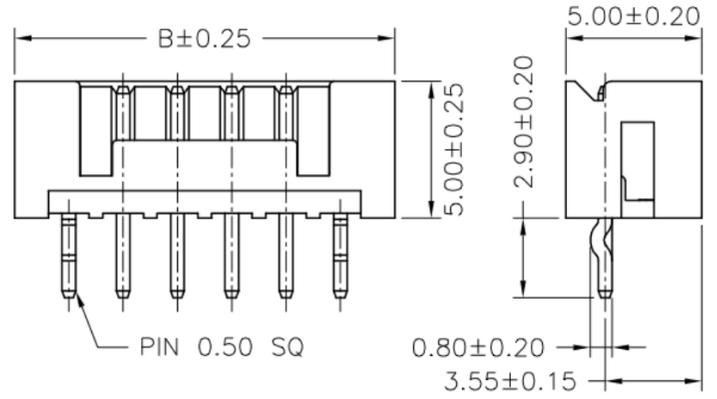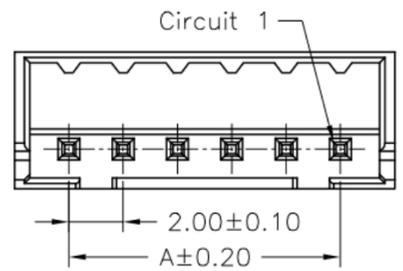

	<b>PROJECTON</b>		<b>Single Row Housing Straight Type</b>		
	<b>DATE</b>	19.06.2017	Customer Drawing-No.:		
	<b>DRAWN</b>	MR	Drawing-No.: 2161220		
	<b>CHECKED</b>	BR			
	<b>APPROVED</b>	BR	<b>UNIT:</b> mm	<b>SCALE:</b>	<b>SIZE:</b> A4