



REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	04.07.17	MR




Technical Specification

Current Rating: 2A AC, DC
 Voltage Rating: 250V AC,DC
 Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
 Contact Resistance: 30mΩ
 Insulation Resistance: 100MΩ
 Withstanding Voltage: 800V AC/minute
 Material Pin: Brass, Sn plated
 Material: Thermoplastic, UL94V-0


Circuit No.	Dimensions	
	A	B
2X02P	2.00	6.00
2X03P	4.00	8.00
2X04P	6.00	10.00
2X05P	8.00	12.00
2X06P	10.00	14.00
2X07P	12.00	16.00
2X08P	14.00	18.00
2X09P	16.00	20.00
2X10P	18.00	22.00
2X11P	20.00	24.00
2X12P	22.00	26.00
2X13P	24.00	28.00
2X14P	26.00	30.00
2X15P	28.00	32.00
2X16P	30.00	34.00
2X17P	32.00	36.00
2X18P	34.00	38.00
2X19P	36.00	40.00
2X20P	38.00	42.00

order information

C200412	-	xx	xx	xx	xx	-	xx
No. of Positions		Plating Option	Type	Packaging	Special Customer		
04~40		01= gold flash	A2= tht	A= bag	xx= on request		
xx= on request		100= tin		xx= on request			
		xx= on request					

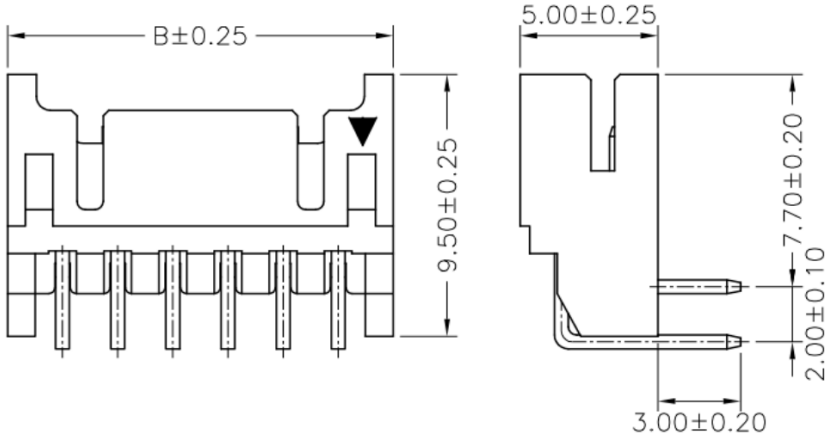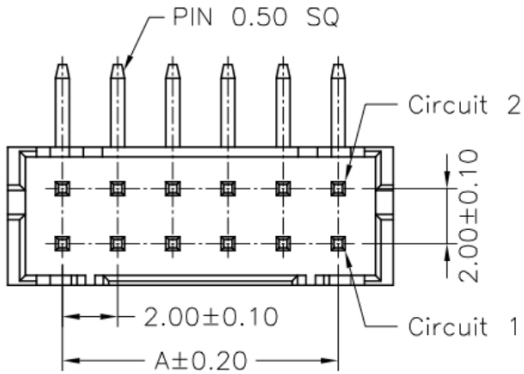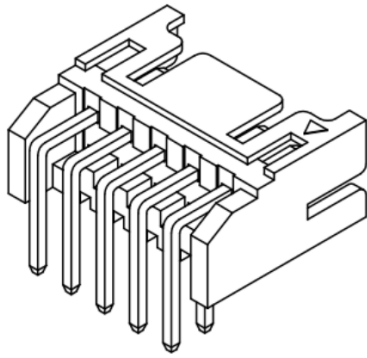

P.C.B LAYOUT



	PROJECTON				
	DATE	04.07.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161326		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4
		mm			

Diese Zeichnung ist ausdrücklich Eigentum der BR-connectors GmbH. Ohne vorherige Zustimmung seitens der BR-connectors GmbH darf diese nicht vervielfältigt, noch an Dritte zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch im Falle einer Patentierung nach Gebrauchsmusterprüfung.