

4

3

2

1

RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	04.07.17	MR

Technical Specification


Current Rating: 3A AC, DC
 Voltage Rating: 500V AC, DC
 Temperature: -25°C to +85°C
high temperature: -40°C to +105°C
 Contact Resistance: 20mΩ
 Insulation Resistance: 100MΩ
 Withstanding Voltage: 1500V AC/minute
 Material Pin: Brass
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02P	2.50	5.00
03P	5.00	7.50
04P	7.50	10.00
05P	10.00	12.50
06P	12.50	15.00
07P	15.00	17.50
08P	17.50	20.00
09P	20.00	22.50
10P	22.50	25.00
11P	25.00	27.50
12P	27.50	30.00
13P	30.00	32.50
14P	32.50	35.00
15P	35.00	37.50





order information

C250403	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~15	01= gold flash	B2= side	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		





02P,03P




04P~06P



07P~15P

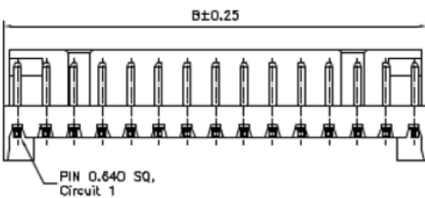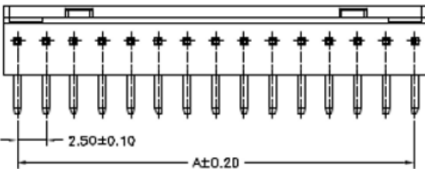

P.C.B. LAYOUT



Single Row Wafer THT Type, Side Entry

Tolerance: .X ± 0.25 .XX ± 0.15 .XXX ± 0.05	PROJECTON				
	DATE	04.07.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161343		
	CHECKED	BR			
APPROVED	BR	UNIT:	SCALE:	SIZE:	A4