

4

3

2

1




RoHS REACH compliant

REVISION DATA				
SYM	REV	DESCRIPTION	DATE	APPR.
	00	new part	03.08.17	MR

Technical Specification



Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC,DC  
 Temperature: -25°C to +85°C  
*high temperature:* -40°C to +105°C  
 Contact Resistance: 20mΩ  
 Insulation Resistance: 1000MΩ  
 Withstanding Voltage: 1000V AC/minute  
 Material Pin: Brass  
 Material: Thermoplastic, UL94V-0

Circuit No.	Dimensions	
	A	B
02PNBK	2.50	7.50
03PNBK	5.00	10.00
04PNBK	7.50	12.50
05PNBK	10.00	15.00
06PNBK	12.50	17.50
07PNBK	15.00	20.00
08PNBK	17.50	22.50
09PNBK	20.00	25.00
10PNBK	22.50	27.50
11PNBK	25.00	30.00
12PNBK	27.50	32.50
13PNBK	30.00	35.00
14PNBK	32.50	37.50
15PNBK	35.00	40.00
16PNBK	37.50	42.50

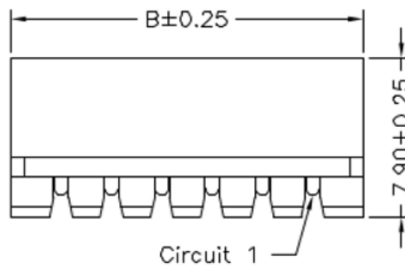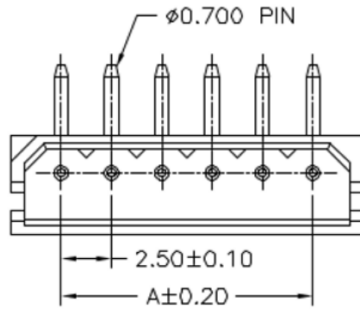

order information

C250405	xx	xx	xx	xx	xx
No. of Positions	Plating Option	Entry	Packaging	Special Customer	
02~16	01= gold flash	B2= side	A= bag	xx= on request	
xx= on request	100= tin		xx= on request		
			xx= on request		



**BRCONNECTORS**

Single Row Wafer  
THT Type, Side Entry

Tolerance: .X ± 0.25 .XX ± 0.15 .XXX ± 0.05	PROJECTON				
	DATE	03.08.2017	Customer Drawing-No.:		
	DRAWN	MR	Drawing-No.: 2161351		
	CHECKED	BR			
APPROVED	BR		UNIT: mm	SCALE:	SIZE: A4

D

C

B

A

D

C

B